

COACH GLASS®

SPECIALTY VEHICLE GLASS

Crate Opening Procedures

1.




Place crate next to a stable backstop

2.



Lean the crate back with the wedges provided

3.

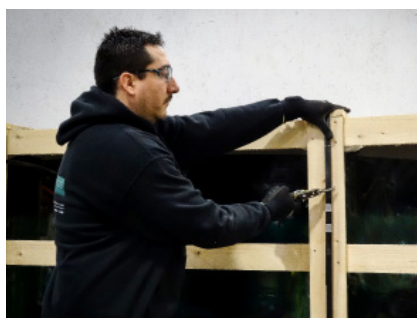

Remove all of the bands

4.



Remove all of the top boards

5.



Open the faceplate by removing the screws and the nails on each side of the crate

*For added safety, we recommend you tie off the windshields when not in use.